

Solarmodule

AX M-60^{3.2}

premium sol
HIGHPOWER

AXSUN Solar
„German Modules with Character“

*Photovoltaic modules from German manufacturer -
developed and manufactured with
German quality demand*

**reliable . powerful . attractive
passionate . honest . empathic**

BIPV

monocrystalline solar module AX M-60 premium sol,
developed for the perfect building integration

SOLRIF®

Solrif has become the market leader with their patented BIPV-System and is well-established due to high yields, functional aesthetics and simple installation. A high efficiency solar roof tile has been developed using PV laminates from AxSun and the Solrif BIPV mounting system from Schweizer. Thus, conventional roof tiles can be totally replaced on a pitched roof.

Our BIPV-System is a real integration compared to roof-mounted PV systems.



HIGHPOWER!



- **15 year product guarantee***
on premium and deluxe products with tempered safety solar glass
- 10 year product guarantee* on premium products with ARC tempered safety solar glass (anti-reflection coating)
- 25 year performance guarantee**
- very good performance tolerance +0/+5Wp
- compatible with all common inverters
- constant production control
- Processing of high quality components according to German quality standards

* You can call up our detailed guarantee and performance conditions under www.axsun.de.

** Performance guarantee: 97.5% in the 1st year, linearised performance guarantee from the 2nd year onwards with a maximum 0.7% reduction in performance per year. Guaranteed 91.2% of the performance in the 10th year and 80.7% of the performance in the 25th year (related to the specified minimum performance).



www.axsun.de

Solarmodule

AX M-60

3.2 premium sol HIGHPOWER


www.axsun.de

Basic data	Sol-Laminate
Dimensions (Length x Width x Height)	1696 x 1018 x 18 mm
Dimensions (Installation) (Length x Width x Height)	1678 x 986 x 18 mm
Weight	20.7 kg
Cells	60 monocrystalline solar cells (156x156mm)
Glass	3.2 mm hardened safety glass
frame	SOLRIF® frame
Bypass-diodes	3 pieces
connection socket	plastic, IP65 type of protection
Cable, plug	4mm ² solar cable, 1000 mm long, high-quality plug system, MC4 compatible
Max. Voltage	1000 V
Max. return current	15 A
Temperature range	-40°C to 85°C
Max. pressure load	5400 Pascal
Max. dynamic load	2400 Pascal
Application class (acc. to IEC 61730)	A
Fire class (acc. to IEC 61730)	C
Protection class	II

Electrical data under standard test conditions *		AX M-60 285	AX M-60 290	AX M-60 295
Rated power	P_{MPP} [Wattpeak]	285 Wp	290 Wp	295 Wp
Rated voltage	U_{MPP} [Volt]	31.75 V	32.01 V	32.27 V
Rated current	I_{MPP} [Ampere]	8.98 A	9.06 A	9.14 A
No-load voltage	U_{OC} [Volt]	39.06 V	39.38 V	39.69 V
Short-circuit current	I_{SC} [Ampere]	9.59 A	9.68 A	9.77 A
Efficiency	η	16.51 %	16.80 %	17.09 %

Electrical behaviour under NOCT**				
Rated power NOCT	P_{NOCT} [Wattpeak]	207 Wp	210 Wp	214 Wp
Rated voltage	U_{MPP} [Volt]	28.41 V	28.64 V	28.87 V
Rated current	I_{MPP} [Ampere]	7.26 A	7.33 A	7.40 A
No-load voltage	U_{OC} [Volt]	35.51 V	35.80 V	36.08 V
Short-circuit current	I_{SC} [Ampere]	7.77 A	7.84 A	7.91 A

Temperature coefficient (in case of temperature change)		
Power	P_{MPP} [Wattpeak]	$Tk P_{MPP} = -0.46 \% / K$
Voltage	U_{OC} [Volt]	$Tk U_{OC} = -0.367 \% / K$
Current	I_{SC} [Ampere]	$Tk I_{SC} = 0.04 \% / K$

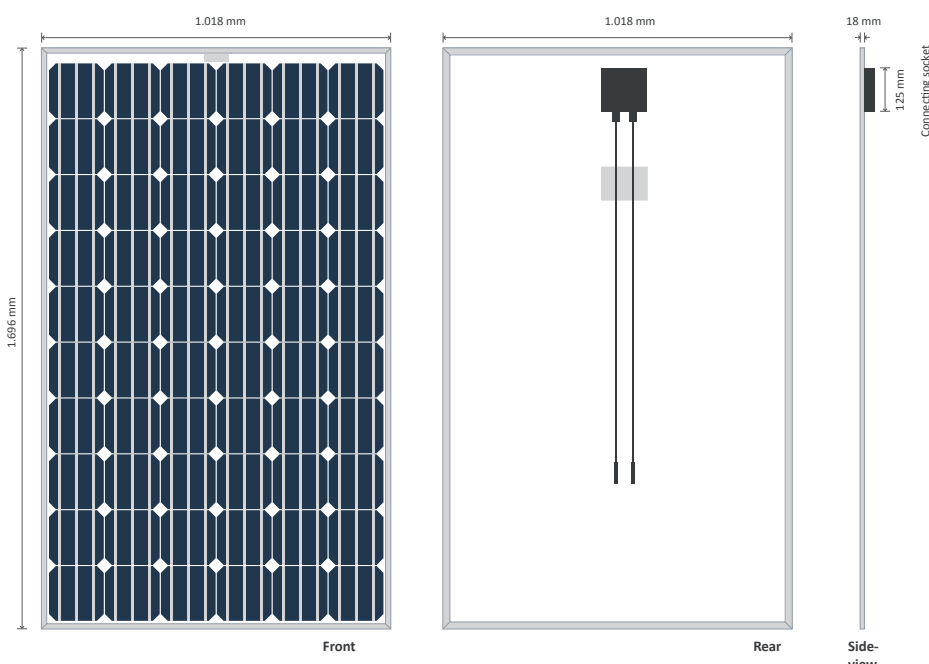

Sales partner AxSun Solar
SolarNord
 83-034 Trąbki Wielkie,
 ul. Akacjowa 8
 Polska
 tel. +48 691 660 838,
 +48 691 660 810
 www.solarnord.pl,
 biuro@solarnord.pl



Certified in accordance with IEC 61215 ed.2 and IEC 61730 u. p. • Further information in the assembly and installation instructions • All data on this data sheet comply with DIN EN 50380 • Measuring tolerance rated power: +/- 4%; other values: Measuring tolerance: +/- 10% ** • Standard test conditions (STC): Radiation into module plane 1000 W/m², (AM) 1.5; 25°C • *** Normal Operating Cell Temperature (NOCT): 800 W/m², (AM) 1.5; 47°C • BIPV-Mounting System Solrif is certified according to TÜVdot.Com. The manufacturer of the system, Ernst Schweizer AG, Hedingen, Switzerland, gives 10 years warranty of the supplied material and parts of the system to AxSun according to the Schweizer terms of warranty, which we send you on demand. In case of warranty please refer to AxSun. The warranty agreement of Ernst Schweizer AG does not refer to the solar modules and the terms of warranty of AxSun Solar GmbH & Co.KG